



PT. LAUTAN CIPTA KREASI

Authorized Distributor for Gate, Garage & Doors automation



Authorized distributor for gate, garage & door automation

SLIDING GATE



BENINCA
TECHNOLOGY TO OPEN

100%
Made in Italy



230VAC

400VAC



BULL 20 M
RESIDENTIAL USE
Up to 2000 kg



230VAC



YAK 25 OTI
INDUSTRIAL USE
Up to 2500 kg



230VAC



BULL 17 OMI
RESIDENTIAL USE
Up to 1700 kg



SWING GATE

100%
Made in Italy


BENINCA
TECHNOLOGY TO OPEN



BOB 50 ME
LINEAR WORM SCREWS
Up to 5.0 m

230VAC

24VDC



BOB 3024 E
LINEAR WORM SCREWS
Up to 3.0 m

myone



SLIDING DOOR

100%
Made in Italy



LUCE HEAVY

The Luce Heavy sliding doors are ideal for automated pedestrian access points in private and public locations: offices, shops and commercial businesses in general.


SWING DOOR



myone

ARIA

100% Made in Italy

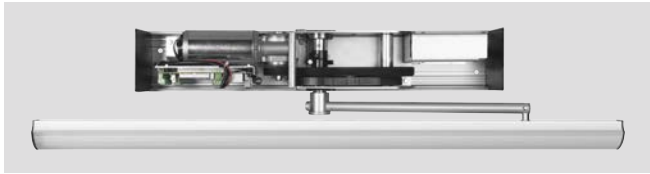

Aria has a new, elegant design with high aesthetic cleanness. It is an operator for single- or double-leafswing doors and is ideal for continuous operation.

RUOTE WHEELS / HINGES + BEARING

100% Made in Italy



UPPER HINGE 451.42

LOWER HINGE 455.4

GATE STOPPER / ROLLER



246.2 / 246.1

White nylon guide rollers



PT. LAUTAN CIPTA KREASI

Authorized Distributor for Gate, Garage & Doors automation

Rukan Citysquare Blok B no 53

Jl Peta Selatan, Kalideres Jakbar 11840

Tel : (021) 2252 0260 / 2252 0323

www.lautanciptakreasi.co.id

BENINCA TECHNOLOGY TO OPEN



ROAD BARRIER

100% Made in Italy



24VDC



EVA 5 | For passages up to 5m

AUTOMATIONS FOR GARAGE



JIM 3

SECTIONAL GARAGE DOORS
RESIDENTIAL/COMMERCIAL USE


24 Vdc | intensive use

• 24 VDC irreversible geared motor for intensive use

24VDC



ACCESSORIES



RI.M4F

M4 rack, to weld or attach with screws, 30x12x1000 mm slotted and galvanised. Supplied with M6 metric screws and threaded spacers.



IRI.TX4VA // IRI.TX4AK

• The new ARC coding guarantees maximum security due to the length of the transmitted code (128 bit) and the high number of possible combinations



PUPILLA.R

Pair of fixed photocells with a relay with N.C. type operation. Two pairs can be installed close to each other without synchronization.



PNO

Surface mounting push buttons with 2 normally open contacts. To be fitted on COL10N pillar.



IRI Lamp

White full range flashing light, 20-255 VAC with built-in aerial.